

Multi 25 **Supply** | Vertical surface



Centrifugal multistage pump for water supply

Applications

Pumping of clean water for domestic, industrial, agricultural and gardening purposes.
Silent.

Materials

Pump body and impellers in AISI 304.
Pump shaft in AISI 420.
Diffusers in technopolymer.
Suction and discharge in cast iron.
Mechanical seal.
Motor casing in aluminium.
O-rings in NBR/EPDM.

Equipment

No cable.
Oval counter flanges DIN 2558 and gaskets included.

Motor

Asynchronous 2 poles.
IPX5 protection.
Class F insulation.
Built-in thermal protection.
Continuous operation.

Limitations


Maximum water temperature 40 °C.



Hydraulic performance table


Model	I [A]	P1 [kW]	P2		c [μF]	l/min	8	17	25	33	42	58	75	85	Code
	1~ 230V	1~	[kW]	[HP]		m³/h	0,5	1,0	1,5	2,0	2,5	3,5	4,5	5,1	1~230V (Model M)
Multi 25 4	5,8	1,2	0,75	1	16	mwc	53	51	48	46	42	33	22	13	00134927
Multi 25 5	6,4	1,4	0,9	1,2	16		66	64	61	57	52	41	27	16	00134928

Performance curve at 2900 rpm

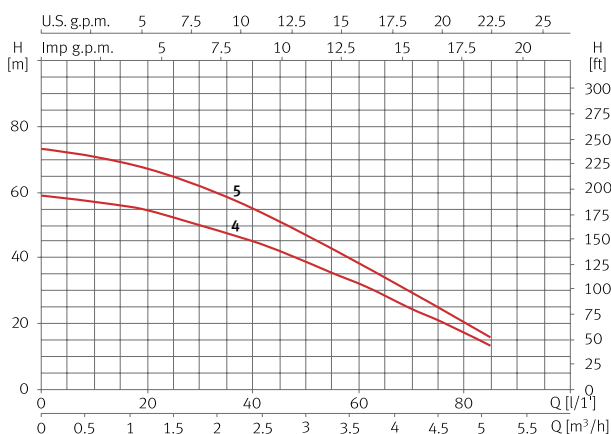

Dimension and weight

Model	A	B	C	D	E	F	G	H	I	J	K	Kg
Multi 25 4	420	205	170	42	203	191	1 1/4"	1 1/4"	125	125	240	17,3
Multi 25 5	442	226	170	42	203	191	1 1/4"	1 1/4"	125	125	240	18,1

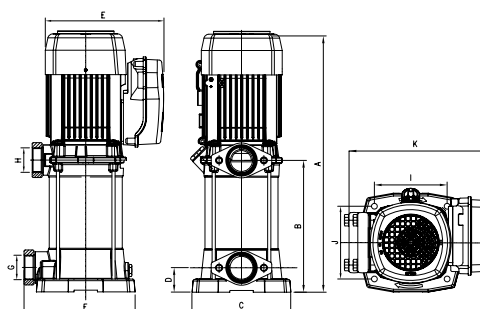

Centrifugal multistage pump for water supply

Applications

Pumping of clean water for domestic, industrial, agricultural and gardening purposes.
Silent.

Materials

Pump body and impellers in AISI 304.
Pump shaft in AISI 420.
Diffusers in technopolymer.
Suction and discharge in cast iron.
Mechanical seal.
Motor casing in aluminium.
O-rings in NBR/EPDM.

Equipment

No cable.
Oval counter flanges DIN 2558 and gaskets included.

Motor

Asynchronous 2 poles.
IPX5 protection.
Class F insulation.
Single phase motor with built-in thermal protection.
Continuous operation.

Limitations


Maximum water temperature 40 °C.



Hydraulic performance table


Model	I [A]			P1 [kW]		P2		c [μF]	l/min	17	33	50	75	100	125	150	175	Code	
	1~230V	3~230V	3~400V	1~	3~	[kW]	[HP]			m³/h	1,0	2,0	3,0	4,5	6,0	7,5	9,0	1~230V (Model M)	3~230V/400V (Model T)
Multi 35 3	6,7	4,5	2,6	1,5	1,4	0,75	1	25	mwc	39	37	35	31	27	21	15	7	00129334	00129338
Multi 35 4	8,4	5,3	3,1	1,8	1,8	1,1	1,5	25		54	51	48	44	37	29	21	12	00129335	00129339
Multi 35 5	10,2	6,9	4	2,3	2,2	1,5	2	30		65	63	60	54	46	36	26	15	00129336	00129340
Multi 35 6	-	8,3	4,8	-	2,7	2,2	3	-		82	80	76	69	61	49	37	23	-	00129341
Multi 35 8	-	11,9	6,5	-	3,6	3	4	-		108	105	101	93	85	70	53	35	-	00129342
Multi 35 10	-	15,4	8,9	-	4,9	4	5,5	-		134	130	125	117	105	90	70	47	-	00129337

Performance curve at 2900 rpm

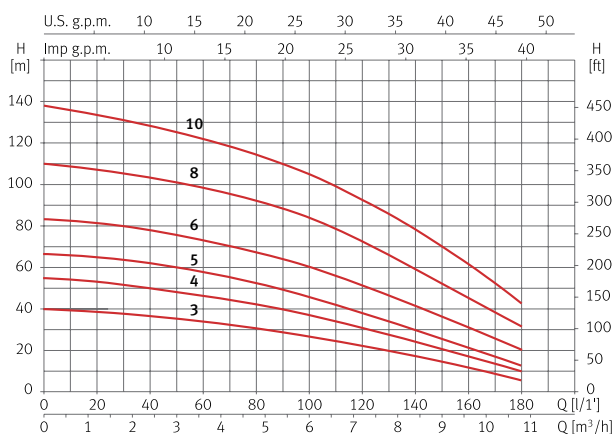

Dimension and weight

Model	A	B	C	D	E	F	G	H	I	Kg
Multi 35 3	487	201,5	184	220	37	133	254	1 1/2"	1 1/4"	20,2/20
Multi 35 4	511,5	226	184	220	37	133	254	1 1/2"	1 1/4"	22,4/20,4
Multi 35 5	536	250,5	184	220	37	133	254	1 1/2"	1 1/4"	25,1/22,7
Multi 35 6	561	275	184	220	37	133	254	1 1/2"	1 1/4"	25,7
Multi 35 8	657,5	323	184	235,5	37	133	244	1 1/2"	1 1/4"	32,6
Multi 35 10	707,5	373	184	235,5	37	133	244	1 1/2"	1 1/4"	39,4

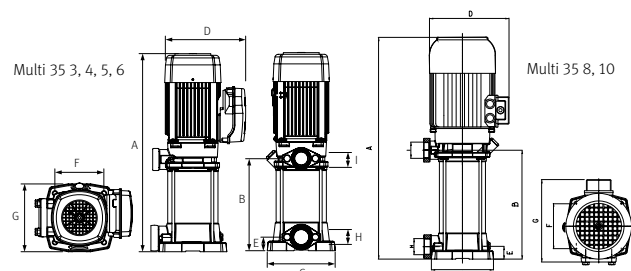

Multi 55 Supply | Vertical surface



Centrifugal multistage pump for water supply

Applications

Pumping of clean water for domestic, industrial, agricultural and gardening purposes.
Silent.

Materials

Pump body and impellers in AISI 304.
Pump shaft in AISI 420.
Diffusers in technopolymer.
Suction and discharge in cast iron.
Mechanical seal.
Motor casing in aluminium.
O-rings in NBR/EPDM.

Equipment

No cable.
Oval counter flanges DIN 2558 and gaskets included.

Motor

Asynchronous 2 poles.
IPX5 protection.
Class F insulation.
Single phase motor with built-in thermal protection.
Continuous operation.

Limitations


Maximum water temperature 40 °C.



Hydraulic performance table

Model	I [A]			P1 [kW]		P2		c [μF]	l/min m³/h	20	50	75	100	150	200	250	300	Code	
	1~230V	3~230V	3~400V	1~	3~	[kW]	[HP]			1,2	3,0	4,5	6,0	9,0	12	15	18	1~230V (Model M)	3~230V/400V (Model T)
Multi 55 3	9,6	6,6	3,8	2,1	2,1	1,5	2	30	mwc	37	35	33	31	28	24	18	10	00131483	00131484
Multi 55 4	-	8,3	4,8	-	2,8	2,2	3	-		50	47	45	43	39	33	26	16	-	00131485
Multi 55 6	-	12,1	7	-	4,2	3	4	-		77	73	70	66	60	52	43	29	-	00131486
Multi 55 7	-	15,6	9	-	4,9	4	5,5	-		90	86	82	78	70	60	50	35	-	00131487

Performance curve at 2900 rpm

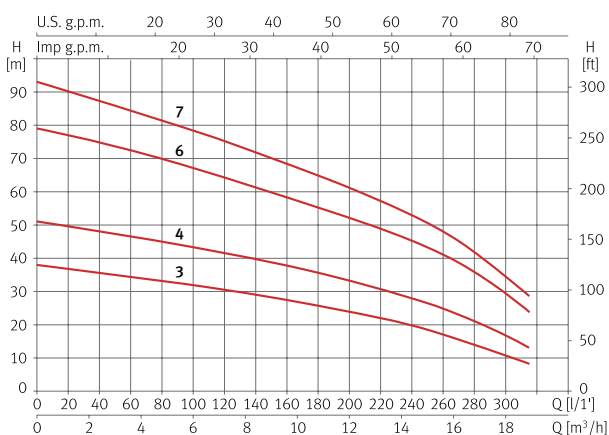

Dimension and weight

Model	A	B	C	D	E	F	G	H	I	Kg
Multi 55 3	531	245	184	235,5	37	133	244	1 1/2"	1 1/4"	25,7/23,3
Multi 55 4	571	285	184	235,5	37	133	244	1 1/2"	1 1/4"	26,6
Multi 55 6	696	362	184	235,5	37	133	244	1 1/2"	1 1/4"	35,4
Multi 55 7	736	402	184	235,5	37	133	244	1 1/2"	1 1/4"	39,7

